PMT Readout Test Stand and Decoder / Encoder Package

PMT Readout Test Stand

- Preparation: still work in progress
  - Yesterday / Today ... slow-readout & XMIT running
    - Testing with two pulses with various width/delay
    - Benchmarking for ~o(1e3) events / run
    - More test during weekend suggested by Chi
  - Decoder & analysis made in a framework

PMT Readout Test Stand

- Preparation: still work in progress
  - Yesterday / Today ... slow-readout & XMIT running
    - Testing with two pulses with various width/delay
    - Benchmarking for ~o(1e3) events / run
    - More test during weekend suggested by Chi
  - Decoder & analysis made in a framework

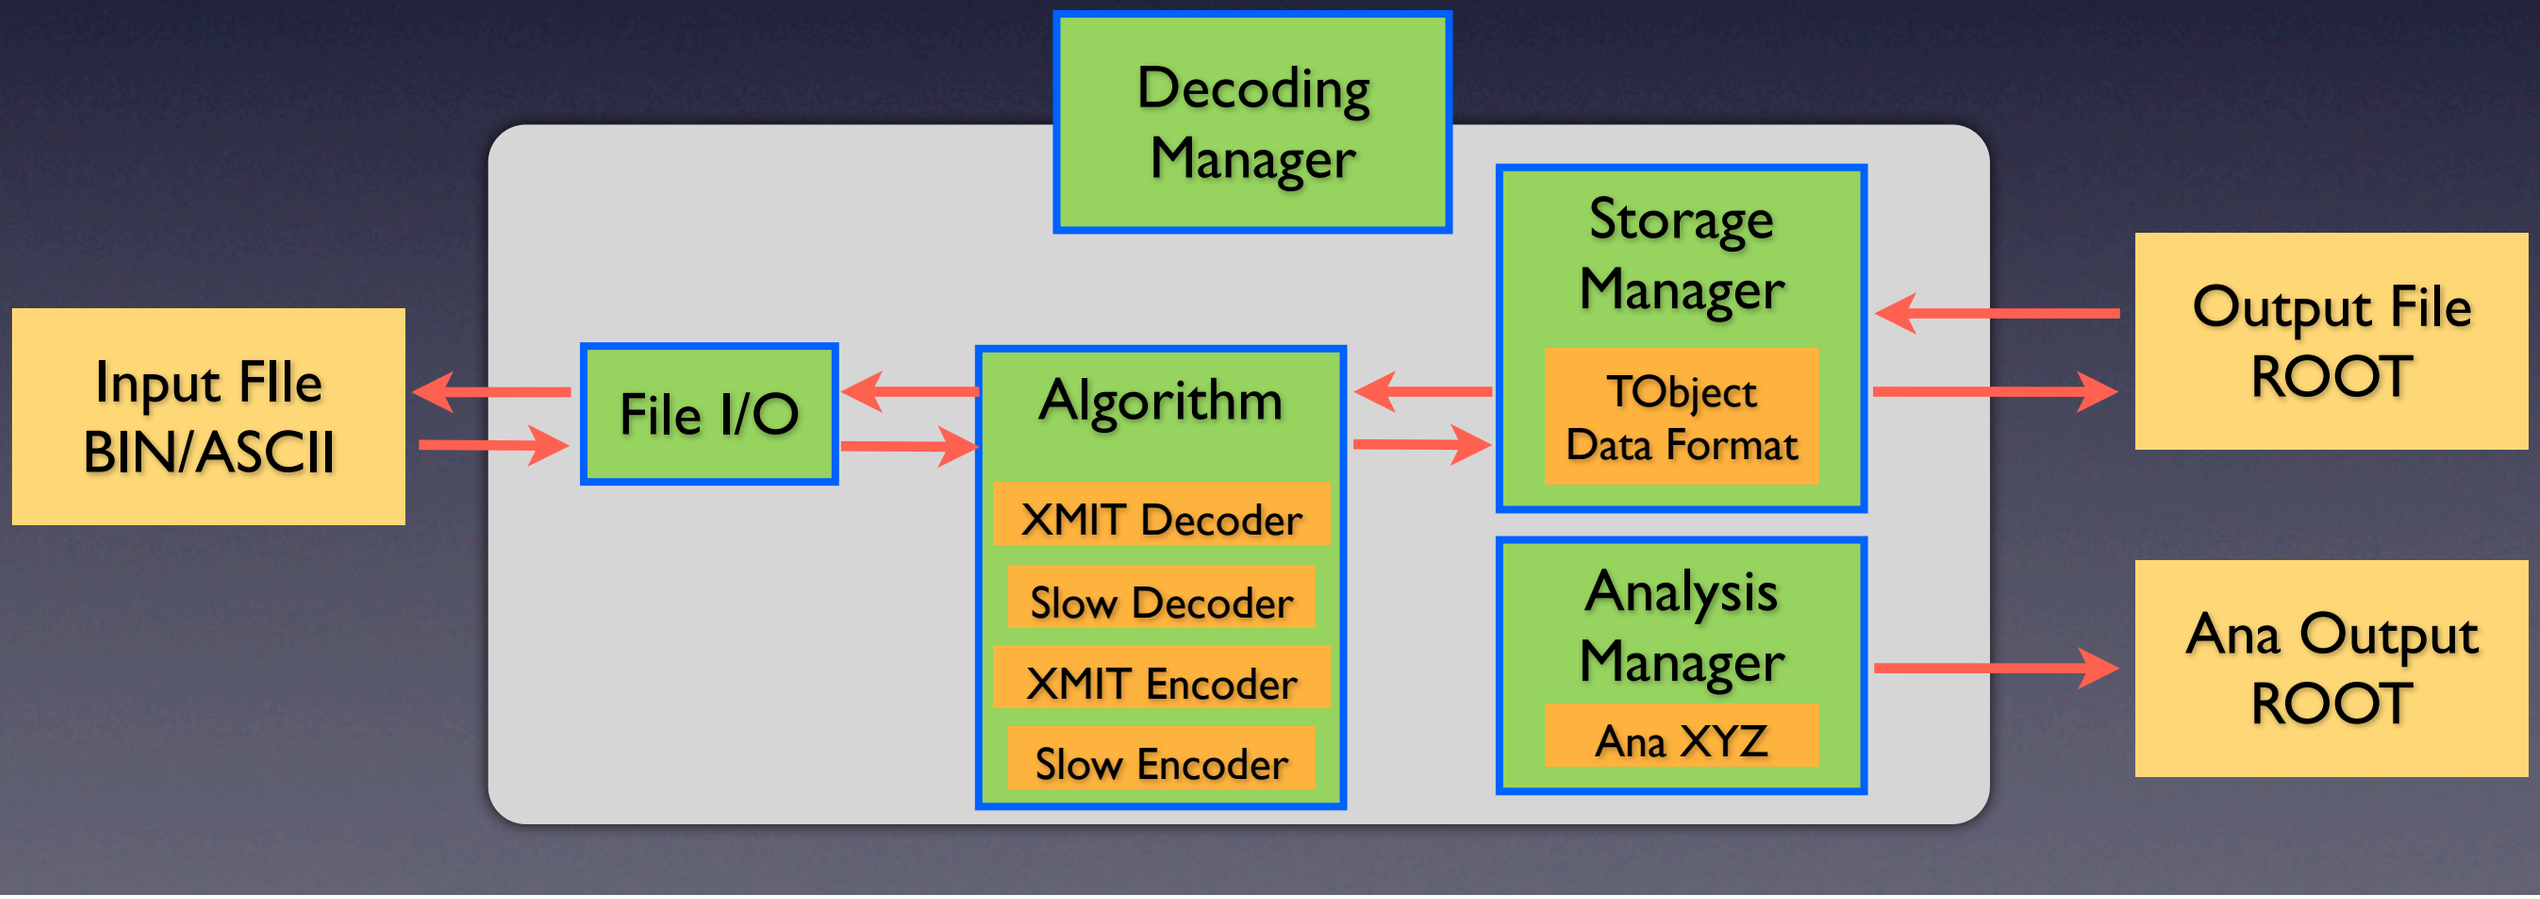

PMT Readout Test Stand

- Preparation: still work in progress
  - Yesterday / Today ... slow-readout & XMIT running
    - Testing with two pulses with various width/delay
    - Benchmarking for ~o(1e3) events / run
    - More test during weekend suggested by Chi
  - Decoder & analysis made in a framework

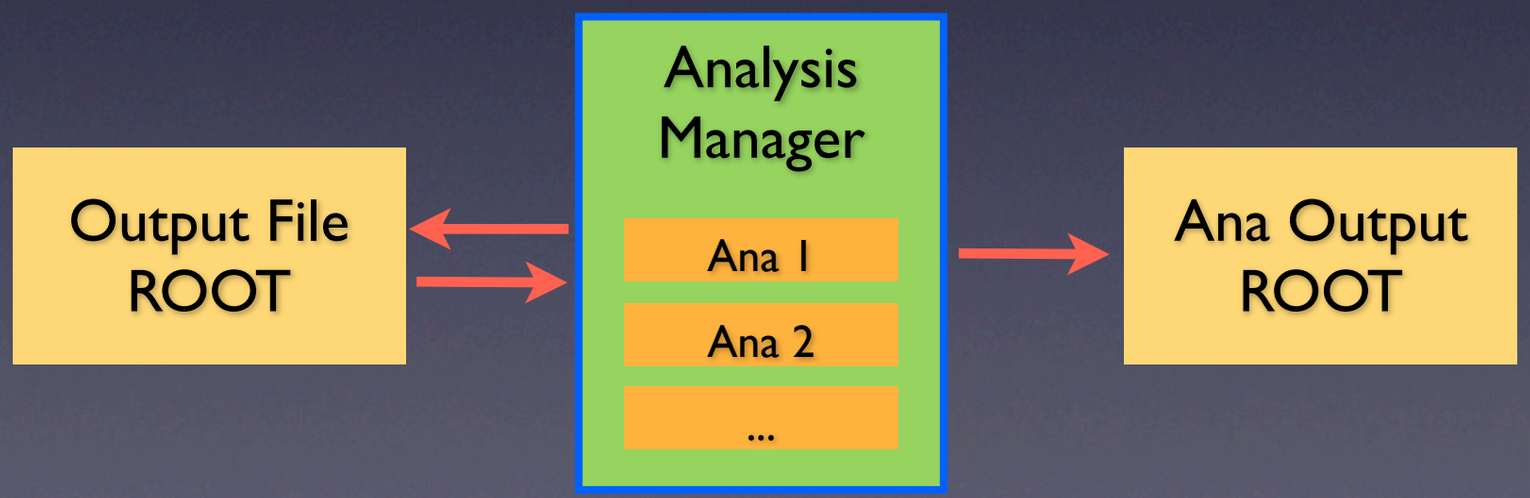

PMT Readout Test Stand

- Preparation: still work in progress
  - Yesterday / Today ... slow-readout & XMIT running
    - Testing with two pulses with various width/delay
    - Benchmarking for ~o(1e3) events / run
    - More test during weekend suggested by Chi
  - Decoder & analysis made in a framework

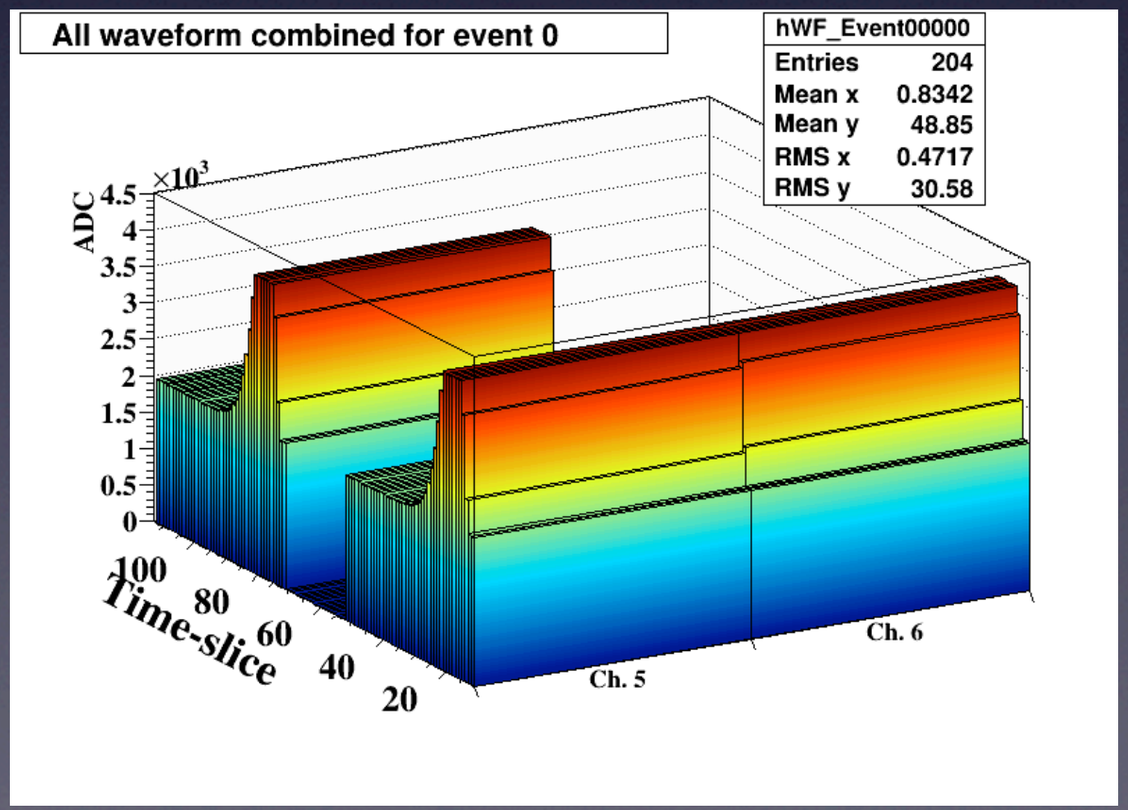

PMT Readout Test Stand

- Preparation: still work in progress
  - Yesterday / Today ... slow-readout & XMIT running
    - Testing with two pulses with various width/delay
    - Benchmarking for ~o(1e3) events / run
    - More test during weekend suggested by Chi
  - Decoder & analysis made in a framework

```
> git clone $USER@houston.nevis.columbia.edu:/a/share/westside/kazuhiro/ub_projects.git ub_projects
> cd ub_projects
> git checkout pmt_decoder_trunk
> cd PMTDecoder
> export MAKE_TOP_DIR=$PWD
> source config/setup.sh
> make
```

Generated by “C++Package”
Support under most Linux + OSX kernel
CINT/PyROOT compatible with dictionaries